



KERDI-DRAIN Shower Checklist

Project reference: _____

FOOTPRINT & BASE

Measurement of Shower

Length: _____ Width: _____ Drain placement: Center Other

1 Pre-sloped KERDI Shower Tray or

Note: Trays can be modified by cutting or extending with dry-pack mortar.

- | | | |
|--|---|---|
| <input type="checkbox"/> 38" x 60"
(KST965/1525) | <input type="checkbox"/> 72" x 72"
(KST1830) | <input type="checkbox"/> 36" x 36"
(KST915BF) |
| <input type="checkbox"/> 48" x 60"
(KST1220/1525) | <input type="checkbox"/> 38" x 60" Off-center
(KST965/1525S) | <input type="checkbox"/> 38" x 38"
(KST965BF) |
| <input type="checkbox"/> 48" x 72"
(KST1220/1830) | <input type="checkbox"/> 32" x 38"
(KST965/810BF) | <input type="checkbox"/> 48" x 48"
(KST1220BF) |
| <input type="checkbox"/> 60" x 60"
(KST1525) | <input type="checkbox"/> 36" x 48"
(KST915/1220BF) | <input type="checkbox"/> 38" x 38" Neo angle
(KST965NA/BF) |

4 Mortar Bed


Note: Be sure to order enough KERDI membrane to cover the surface of the mortar bed.

2 Curbs and/or

- 38" L x 4-1/2" W x 6" H
(KBSC115150970)
Qty: _____
- 48" L x 4-1/2" W x 6" H
(KBSC1151501220)
Qty: _____
- 60" L x 4-1/2" W x 6" H
(KBSC1151501524)
Qty: _____

Ramp

- 48" L x 15-7/8" W x 1-1/2" H
(SR122)
Qty: _____

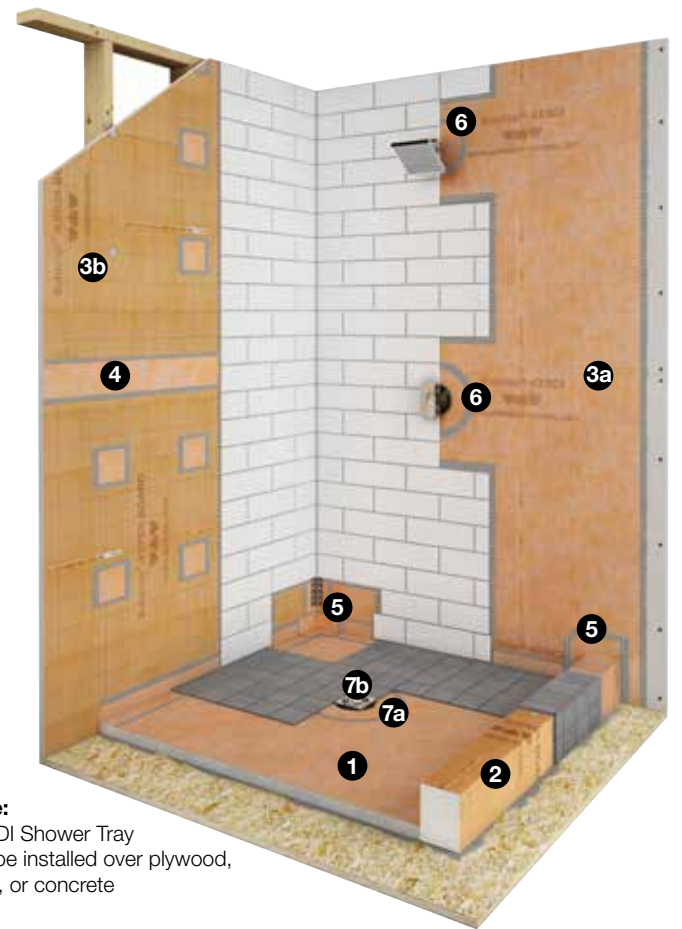

Note: KERDI Shower Tray can be installed over plywood, OSB, or concrete

WALLS

Measurement of Walls

Wall #1: _____ x _____ = _____ Wall #2: _____ x _____ = _____
 Wall #3: _____ x _____ = _____ Wall #4: _____ x _____ = _____
 Wall #5: _____ x _____ = _____ Total ft² = _____

3 Type of Wall and Waterproofing

3a. Solid backing with KERDI or **3b. Waterproof building panel**

- Dry wall
- Concrete board

KERDI membrane

- 3'-3" x 16'-5" (54 ft²)
(KERDI200/5M)
- 3'-3" x 23' (75 ft²)
(KERDI200/7M)
- 3'-3" x 33' (108 ft²)
(KERDI200/10M)
- 3'-3" x 65'-7" (215 ft²)
(KERDI200/20M)
- 3'-3" x 98'-5" (323 ft²)
(KERDI200)
- 6'-7" x 98'-5" (646 ft²)
(KERDI200200)

- #### KERDI-BOARD
- 32" x 48" x 1/2"
(KB121220812)
 - 64" x 48" x 1/2"
(KB1212201625)
 - 96" x 48" x 1/2"
(KB1212202440)

KERDI-BOARD-ZT/-ZS

- Washers
- Screws

4 KERDI-BAND

(5" wide - used to connect KERDI membrane or KERDI-BOARD with 2" overlap)

Linear feet wall seams: _____ Linear feet pan seams: _____

- 5" x 16'-5" (KEBA100/125/5M)
- 5" x 33' (KEBA100/125/10M)
- 5" x 98'-5" (KEBA100/125)

5 KERDI-KERECK (waterproof corners)

Note: Drain Kit includes 4 inside and 2 outside corners

- Inside corners: _____
(KERECK/FI2 - 2 pack or KERECK/FI10 - 10 pack)
- Outside corners: _____
(KERECK/FA2 - 2 pack or KERECK/FA10 - 10 pack)

6 KERDI-SEALS (waterproof seals)

Note: Drain Kit includes 1 pipe seal with 3/4" opening and 1 mixing valve seal

- Pipe seal: _____
(KMS185/12 - 1/2" opening or KMS185/20 - 3/4" opening)
- Mixing valve seal: _____
(KMSM235/114 - 4-1/2" opening)

OPTIONAL: KERDI-FIX (sealing and bonding compound)

- 290 ml KERDIFIX/BW (Bright white)
- 290 ml KERDIFIX/G (Grey)
- 100 ml KERDIFIX/100G (Grey)

View installation videos at: www.schluter.com

IMPORTANT: Please read the Schluter®-Shower System Installation Handbook and Schluter®-Shower System Technical Data Sheet to ensure the materials you have selected are appropriate for your application.

DRAIN

7a Flange Selection

- | | |
|--|--|
| <input type="checkbox"/> ABS 2"
(KD2FLKABS) | <input type="checkbox"/> ABS 2" Horizontal
(KDH2FLKABS) |
| <input type="checkbox"/> PVC 2"
(KD2FLKPVC) | <input type="checkbox"/> PVC 2" Horizontal
(KDH2FLKPVC) |
| <input type="checkbox"/> ABS 3"
(KD3FLKABS) | <input type="checkbox"/> Stainless Steel 2"
(KD2FLKE) |
| <input type="checkbox"/> PVC 3"
(KD3FLKPVC) | <input type="checkbox"/> Stainless Steel 3"
(KD3FLKE) |

Adaptor Kits

Convert an existing clamping ring drain

- 5-1/4" Adaptor Kit (KDA5FLKABS)
- 7-1/2" Adaptor Kit (KDA7FLKABS)

7b Grate Selection

		4" GRATES				
		Stainless Steel Design 1	Brushed Anodized Aluminum Design 2	Brushed Stainless Steel Curve	Brushed Stainless Steel Floral	Brushed Stainless Steel Pure
STYLE						
FINISH		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Stainless Steel	<input type="checkbox"/> KD4GRKE			<input type="checkbox"/> KDIF4GRKEBD6	<input type="checkbox"/> KDIF4GRKEBD5	<input type="checkbox"/> KDIF4GRKEBD8
Chrome	<input type="checkbox"/> KD4GRKEP					
Oil-rubbed Bronze	<input type="checkbox"/> KD4GRKEOB					
Nickel	<input type="checkbox"/> KD4GRKET	<input type="checkbox"/> KD4GRKATGB	<input type="checkbox"/> KDIF4GRKEBTD6	<input type="checkbox"/> KDIF4GRKEBTD5	<input type="checkbox"/> KDIF4GRKEBTD8	
Rose Gold	<input type="checkbox"/> KD4GRKERG		<input type="checkbox"/> KDIF4GRKEBRGD6	<input type="checkbox"/> KDIF4GRKEBRGD5	<input type="checkbox"/> KDIF4GRKEBRGD8	
Vintage Gold	<input type="checkbox"/> KD4GRKEVG		<input type="checkbox"/> KDIF4GRKEBVG6	<input type="checkbox"/> KDIF4GRKEBVG5	<input type="checkbox"/> KDIF4GRKEBVG8	
Classic Gold	<input type="checkbox"/> KD4GRKECG		<input type="checkbox"/> KDIF4GRKEBCGD6	<input type="checkbox"/> KDIF4GRKEBCGD5	<input type="checkbox"/> KDIF4GRKEBCGD8	
Copper		<input type="checkbox"/> KD4GRKAKGB				
Brass		<input type="checkbox"/> KD4GRKAMGB				

or **Tileable Grate - 4"** KD4GRKECS

		6" GRATES	
Stainless Steel		<input type="checkbox"/> KD6GRKE	<input type="checkbox"/> KD6GRKRE

ACCESSORIES

KERDI-BOARD Benches

Note: Waterproofing corners are included

Triangle:

- 16" L x 16" W x 20" H (KBSB410TA)
- 24" L x 24" W x 20" H (KBSB610TA)

Rectangle:

- 11-1/2" L x 38" W x 20" H (KBSB290970RA)
- 16" L x 48" W x 20" H (KBSB4101220RA)

KERDI-BOARD to Make a Custom Bench

- 96" x 24-1/2" x 2" (KB506252440)

KERDI-BOARD Niches

- 12" W x 6" H (KB12SN305152A)
- 12" W x 12" H (KB12SN305305A)
- 12" W x 20" H - with shelf (KB12SN305508A1)
- 12" W x 28" H - with shelf (KB12SN305711A1)

KERECK Bench/Neo-angle Corner Kit

- 1 right and 1 left bench corner, and two 135° inside corners (KERSB135K)





KERDI-LINE Shower Checklist

Project reference: _____

FOOTPRINT & BASE

Measurement of Shower

Length: _____ Width: _____ Drain placement: Center Other

1 Pre-sloped KERDI Shower Tray

or

Mortar Bed

Note: Trays can be modified by cutting or extending with dry-pack mortar.

- | | | |
|---|---|---|
| <input type="checkbox"/> 39" x 39"
(KSLT1000) | <input type="checkbox"/> 36" x 72" Perimeter
(KSLT915/1830S) | <input type="checkbox"/> 55" x 55" Perimeter
(KSLT1395S) |
| <input type="checkbox"/> 55" x 55"
(KSLT1395) | <input type="checkbox"/> 76" x 38" Perimeter
(KSLT1930/965S) | <input type="checkbox"/> 38" x 76" Perimeter
(KSLT965/1930S) |
| <input type="checkbox"/> 48" x 48" Perimeter
(KSLT1220S) | <input type="checkbox"/> 48" x 48"
(KSLT1220) | |
| <input type="checkbox"/> 36" x 55"
(KSLT915/1395S) | <input type="checkbox"/> 39" x 39" Perimeter
(KSLT1000S) | |

Note: Be sure to order enough KERDI membrane to cover the surface of the mortar bed.

2 Curbs

and/or

Ramp

- | | |
|--|--|
| <input type="checkbox"/> 38" L x 4-1/2" W x 6" H
(KBSC115150970)
Qty: _____ | <input type="checkbox"/> 48" L x 15-7/8" W x 1-1/2" H
(SR122)
Qty: _____ |
| <input type="checkbox"/> 48" L x 4-1/2" W x 6" H
(KBSC1151501220)
Qty: _____ | |
| <input type="checkbox"/> 60" L x 4-1/2" W x 6" H
(KBSC1151501524)
Qty: _____ | |

WALLS

Measurement of Walls

Wall #1: ____ x ____ = ____ Wall #2: ____ x ____ = ____
 Wall #3: ____ x ____ = ____ Wall #4: ____ x ____ = ____
 Wall #5: ____ x ____ = ____ Total ft² = _____

3 Type of Wall and Waterproofing

3a. Solid backing with KERDI

or

3b. Waterproof building panel

- Dry wall
 Concrete board

KERDI membrane

- 3'-3" x 16'-5" (54 ft²)
(KERDI200/5M)
 3'-3" x 23' (75 ft²)
(KERDI200/7M)
 3'-3" x 33' (108 ft²)
(KERDI200/10M)
 3'-3" x 65'-7" (215 ft²)
(KERDI200/20M)
 3'-3" x 98'-5" (323 ft²)
(KERDI200)
 6'-7" x 98'-5" (646 ft²)
(KERDI200200)

KERDI-BOARD

- 32" x 48" x 1/2"
(KB121220812)
 64" x 48" x 1/2"
(KB1212201625)
 96" x 48" x 1/2"
(KB1212202440)

KERDI-BOARD-ZT/-ZS

- Washers
 Screws

4 KERDI-BAND

(5" wide - used to connect KERDI membrane or KERDI-BOARD with 2" overlap)

Linear feet wall seams: _____ Linear feet pan seams: _____

- 5" x 16'-5"
(KEBA100/125/5M) 5" x 33'
(KEBA100/125/10M) 5" x 98'-5"
(KEBA100/125)

5 KERDI-KERECK (waterproof corners)

Note: Drain Kit includes 4 inside and 2 outside corners

- Inside corners: _____
(KERECK/FI2 - 2 pack or KERECK/FI10 - 10 pack)
 Outside corners: _____
(KERECK/FA2 - 2 pack or KERECK/FA10 - 10 pack)

6 KERDI-SEALS (waterproof seals)

Note: Drain Kit includes 1 pipe seal with 3/4" opening and 1 mixing valve seal

- Pipe seal: _____
(KMS185/12 - 1/2" opening or KMS185/20 - 3/4" opening)
 Mixing valve seal: _____
(KMSMV235/114 - 4-1/2" opening)

OPTIONAL: KERDI-FIX (sealing and bonding compound)

- 290 ml KERDIFIX/BW (Bright white)
 290 ml KERDIFIX/G (Grey)
 100 ml KERDIFIX/100G (Grey)

View installation videos at: www.schluter.com

IMPORTANT: Please read the Schluter®-Shower System Installation Handbook and Schluter®-Shower System Technical Data Sheet to ensure the materials you have selected are appropriate for your application.




Note: KERDI Shower Tray can be installed over plywood, OSB, or concrete

DRAIN

7a Channel Body Selection

- Center outlet

Length: _____




Note: The stated length of the KERDI-LINE is the size of the grate assembly, the actual opening must be 1" larger all around to accommodate the channel body flange.

- | | | |
|---|---|--|
| <input type="checkbox"/> 19-11/16"
(KL1V60E50) | <input type="checkbox"/> 39-3/8"
(KL1V60E100) | <input type="checkbox"/> 59-1/16"
(KL1V60E150) |
| <input type="checkbox"/> 23-5/8"
(KL1V60E60) | <input type="checkbox"/> 43-5/16"
(KL1V60E110) | <input type="checkbox"/> 62-15/16"
(KL1V60E160) |
| <input type="checkbox"/> 27-9/16"
(KL1V60E70) | <input type="checkbox"/> 47-1/4"
(KL1V60E120) | <input type="checkbox"/> 66-7/8"
(KL1V60E170) |
| <input type="checkbox"/> 31-1/2"
(KL1V60E80) | <input type="checkbox"/> 51-3/16"
(KL1V60E130) | <input type="checkbox"/> 70-13/16"
(KL1V60E180) |
| <input type="checkbox"/> 35-7/16"
(KL1V60E90) | <input type="checkbox"/> 55-1/8"
(KL1V60E140) | |

- Off-set outlet

Length: _____



Note: The stated length of the KERDI-LINE is the size of the grate assembly, the actual opening must be 1" larger all around to accommodate the channel body flange.

- | | | |
|---|---|--|
| <input type="checkbox"/> 27-9/16"
(KL1VO60E70) | <input type="checkbox"/> 35-7/16"
(KL1VO60E90) | <input type="checkbox"/> 43-5/16"
(KL1VO60E110) |
| <input type="checkbox"/> 31-1/2"
(KL1VO60E80) | <input type="checkbox"/> 39-3/8"
(KL1VO60E100) | <input type="checkbox"/> 47-1/4"
(KL1VO60E120) |

7b Grate Selection

STYLE - Brushed stainless steel



- Curve
Closed

- Floral

- Pure




- Brushed Stainless steel (EB) Chrome (EP)

Perforated



- Brushed Stainless steel (EB) Chrome (EP)

Tileable



- Tileable

If you have selected a Closed or Perforated grate you must choose your frame height:



- 3/4" frame height
for tile thicknesses of 1/8" - 9/16"

- 1-1/8" frame height
for tile thicknesses of 1/2" - 1"

ACCESSORIES

All accessories such as benches and niches can be selected on the other side of this page.



Schluter® Thin-set Mortar



*Applicable when used as a Thin-Set System. For full warranty details, please visit www.schluter.com/warranty