




Product Item Numbers



Aluminum



Schluter®-QUADEC-K						
Length = 2.5 m - 8' 2-1/2"	Satin anodized aluminum (AE)			Polished chrome anod. alu. (ACG)		
H = mm - in.	Profile	Inside/outside corner	Connector	Profile	Inside/outside corner	Connector
12.5 - 1/2	Q 125 AE K	EV/Q 125 AE	V/RO 125	Q 125 ACG K	EV/Q 125 ACG	V/RO 125
Length = 2.5 m - 8' 2-1/2"	Satin nickel anod. alu. (AT)			Brushed antique bronze anod. alu. (ABGB)		
H = mm - in.	Profile	Inside/outside corner	Connector	Profile	Inside/outside corner	Connector
12.5 - 1/2	Q 125 AT K	EV/Q 125 AT	V/RO 125	Q 125 ABGB K	EV/Q 125 ABGB	V/RO 125




Schluter®-QUADEC-FS				
Length = 2.5 m - 8' 2-1/2"	Satin anodized aluminum (AE)		Polished chrome anod. alu. (ACG)	
H = mm - in.	Profile	Inside/outside corner	Profile	Inside/outside corner
8 - 5/16	QF8/50 AE	EV/QF8/50 AE	QF8/50 ACG	EV/QF8/50 ACG
Length = 2.5 m - 8' 2-1/2"	Satin nickel anod. alu. (AT)		Brushed antique bronze anod. alu. (ABGB)	
H = mm - in.	Profile	Inside/outside corner	Profile	Inside/outside corner
8 - 5/16	QF8/50 AT	EV/QF8/50 AT	QF8/50 ABGB	EV/QF8/50 ABGB


Inside/outside corner/
End cap



Aluminum



Schluter®-INDEC				
Length = 2.5 m - 8' 2-1/2"	Satin anodized aluminum (AE)	Cast zinc with AE appearance	Polished chrome anod. alu. (ACG)	Cast zinc with ACG appearance
H = mm - in.	Profile	Outside corner 90°	Profile	Outside corner 90°
8 - 5/16	IN 80 AE	ED / IN 80 AE	IN 80 ACG	ED / IN 80 ACG
10 - 3/8	IN 100 AE	ED / IN 100 AE	IN 100 ACG	ED / IN 100 ACG
11 - 7/16	IN 110 AE	ED / IN 110 AE	IN 110 ACG	ED / IN 110 ACG
12.5 - 1/2	IN 125 AE	ED / IN 125 AE	IN 125 ACG	ED / IN 125 ACG




Schluter®-FINEC		
Length = 2.5 m - 8' 2-1/2"	Stainless steel 304 (1.4301 = V2A) (E)	Satin anodized aluminum (AE)
H = mm - in.	Item No.	Item No.
2.5 - 3/32	-	F 25 AE
4.5 - 3/16	F 45 E	F 45 AE
7 - 9/32	F 70 E	F 70 AE
9 - 11/32	F 90 E	F 90 AE
11 - 7/16	F 110 E	F 110 AE
12.5 - 1/2	F 125 E	F 125 AE

Length = 2.5 m - 8' 2-1/2"	Textured color-coated aluminum
H = mm - in.	Item No.
2.5 - 3/32	F 25 MBW
4.5 - 3/16	F 45 + color*
7 - 9/32	F 70 + color*
9 - 11/32	F 90 + color*
11 - 7/16	F 110 + color*
12.5 - 1/2	F 125 + color*

***Color Codes**

* To complete the item number, add the **color** code (e.g., F 70 **TSC**).




Schluter®-FINEC-SQ		
Length = 2.5 m - 8' 2-1/2"	Satin anodized aluminum (AE)	
H = mm - in.	Profile	Inside/Outside Corner
11 - 7/16	FSQ 110 AE	EV/Q 45 AE
12.5 - 1/2	FSQ 125 AE	
15 - 9/16	FSQ 150 AE	
Length = 2.5 m - 8' 2-1/2"	Textured color-coated aluminum	
H = mm - in.	Profile	Inside/Outside Corner
11 - 7/16	FSQ 110 + color*	EV/Q 45 + color*
12.5 - 1/2	FSQ 125 + color*	
15 - 9/16	FSQ 150 + color*	

***Color Codes**

* To complete the item number, add the **color** code (e.g., FSQ 110 **TSC**).

Note: The visible surface for all sizes of FINEC-SQ matches that of QUADEC 45. All FINEC-SQ sizes are compatible with EV/ Q 45 only.




Schluter®-RONDEC-DB				
Length = 2.5 m - 8' 2-1/2"	Satin anodized aluminum (AE)		Satin copper anod. alu. (AK)	Satin brass anod. alu. (AM)
H = mm - in.	Profile	Outside corner, 90°	Profile	Profile
14 - 17/32	DB 14 AE	EV/DB 14 AE	DB 14 AK	DB 14 AM


10-foot (3.05 m) RONDEC-DB Profile	
Length = 3.05 m - 10'	Satin anodized aluminum (AE)
H = mm - in.	Profile
14 - 17/32	DB 14 AE / 300



Aluminum



Stainless steel, Brass



Schluter®-DESIGNLINE			
Length = 2.5 m - 8' 2-1/2"	Stainless steel 304 (1.4301 = V2A) (E)	Brushed stainless steel 304 (1.4301 = V2A) (EB)	Chrome-plated solid brass (MC)
H = mm - in.	Item No.	Item No.	Item No.
6 - 1/4	DL 625 E	DL 625 EB	DL 625 MC


Length = 2.5 m - 8' 2-1/2"	Satin anodized aluminum (AE)	Polished chrome anod. alu. (ACG)	Brushed chrome anod. alu. (ACGB)
H = mm - in.	Item No.	Item No.	Item No.
6 - 1/4	DL 625 AE	DL 625 ACG	DL 625 ACGB

Length = 2.5 m - 8' 2-1/2"	Satin nickel anod. alu. (AT)	Polished nickel anod. alu. (ATG)	Brushed nickel anod. alu. (ATGB)
H = mm - in.	Item No.	Item No.	Item No.
6 - 1/4	DL 625 AT	DL 625 ATG	DL 625 ATGB


Length = 2.5 m - 8' 2-1/2"	Satin copper anod. alu. (AK)	Polished copper anod. alu. (AKG)	Brushed copper anod. alu. (AKGB)
H = mm - in.	Item No.	Item No.	Item No.
6 - 1/4	DL 625 AK	DL 625 AKG	DL 625 AKGB

Length = 2.5 m - 8' 2-1/2"	Satin brass anod. alu. (AM)	Polished brass anod. alu. (AMG)	Brushed brass anod. alu. (AMGB)
H = mm - in.	Item No.	Item No.	Item No.
6 - 1/4	DL 625 AM	DL 625 AMG	DL 625 AMGB

Note: All corresponding item numbers of the RONDEC finishes match DESIGNLINE.



Aluminum



Schluter®-DESIGNBASE-SL			
Length = 2.5 m - 8' 2-1/2"	Satin anodized aluminum (AE)		
H = mm - in.	Profile	Outside corner, 90°	Inside corner, 90°
60 - 2-3/8	DB SL 60 AE	ED / DB SL 60 AE	ID / DB SL 60 AE
80 - 3-1/8	DB SL 80 AE	ED / DB SL 80 AE	ID / DB SL 80 AE

H = mm - in.	End cap (left)	End cap (right)	Connector
60 - 2-3/8	EL / DB SL 60 AE	ER / DB SL 60 AE	V / DB SL 60 AE
80 - 3-1/8	EL / DB SL 80 AE	ER / DB SL 80 AE	V / DB SL 80 AE

Length = 2.5 m - 8' 2-1/2"	Anodized aluminum with brushed stainless steel appearance (AEEB)		
H = mm - in.	Profile	Outside corner, 90°	Inside corner, 90°
60 - 2-3/8	DB SL 60 AEEB	ED / DB SL 60 AEEB	ID / DB SL 60 AEEB
80 - 3-1/8	DB SL 80 AEEB	ED / DB SL 80 AEEB	ID / DB SL 80 AEEB


H = mm - in.	End cap (left)	End cap (right)	Connector
60 - 2-3/8	EL / DB SL 60 AEEB	ER / DB SL 60 AEEB	V / DB SL 60 AEEB
80 - 3-1/8	EL / DB SL 80 AEEB	ER / DB SL 80 AEEB	V / DB SL 80 AEEB

Note: For reasons associated with production technology, inside corners ID / DB SL 60 AEEB and ID / DB SL 80 AEEB are not brushed.

Length = 2.5 m - 8' 2-1/2"	Matte white color-coated aluminum (MBW)		
H = mm - in.	Profile	Outside corner, 90°	Inside corner, 90°
60 - 2-3/8	DB SL 60 MBW	ED / DB SL 60 MBW	ID / DB SL 60 MBW
80 - 3-1/8	DB SL 80 MBW	ED / DB SL 80 MBW	ID / DB SL 80 MBW


H = mm - in.	End cap (left)	End cap (right)	Connector
60 - 2-3/8	EL / DB SL 60 MBW	ER / DB SL 60 MBW	V / DB SL 60 MBW
80 - 3-1/8	EL / DB SL 80 MBW	ER / DB SL 80 MBW	V / DB SL 80 MBW

Length = 2.5 m - 8' 2-1/2"	Schluter®-DESIGNBASE-SLZ
	Sealing lip
	DB ZS LL






Stainless steel





Schluter®-DESIGNBASE-SL-E			
Length = 2.5 m - 8' 2-1/2"	Brushed stainless steel 304 (1.4301 = V2A) (EB)		
H = mm - in.	Profile	Outside corner, 90°	Inside corner, 90°
110 - 4-3/8	DB SL 110 EB	E90 / DB SL 110 EB	I90 / DB SL 110 EB
160 - 6-3/8	DB SL 160 EB	E90 / DB SL 160 EB	I90 / DB SL 160 EB

H = mm - in.	End cap (left)	End cap (right)	Connector
110 - 4-3/8	EL / DB SL 110 EB	ER / DB SL 110 EB	V / DB SL 110 EB
160 - 6-3/8	EL / DB SL 160 EB	ER / DB SL 160 EB	V / DB SL 160 EB

Length = 2.5 m - 8' 2-1/2"	Schluter®-DESIGNBASE-SLZ-E
Sealing lip	
DB ZS LL E	

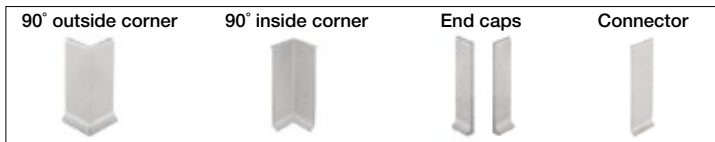


Sealing lip

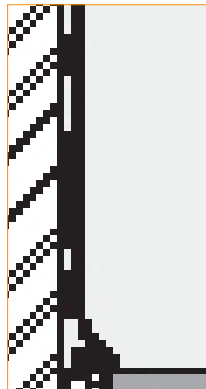


Schluter®-DECO-DE		
Length = 2.5 m - 8' 2-1/2"	Stainless steel 304 (1.4301 = V2A) (E)	Brushed stainless steel 304 (1.4301 = V2A) (EB)
H = mm - in.	Item No.	Item No.
8 - 5/16	DE 80 ES	DE 80 EBS
10 - 3/8	DE 100 ES	DE 100 EBS
11 - 7/16	DE 110 ES	DE 110 EBS
12.5 - 1/2	DE 125 ES	DE 125 EBS



Aluminum



Stainless steel




Schluter®-DECO-SG			
Length = 2.5 m - 8' 2-1/2"	Brushed stainless steel 304 (1.4301 = V2A) (EB)	Satin anodized aluminum (AE)	Bright chrome anodized aluminum (ACB)
H = mm - in.	Item No.	Item No.	Item No.
W: 12.5 mm - 1/2"			
8 - 5/16	SG 80 EB 12	SG 80 AE 12	SG 80 ACB 12
10 - 3/8	SG 100 EB 12	SG 100 AE 12	SG 100 ACB 12
11 - 7/16	SG 110 EB 12	SG 110 AE 12	SG 110 ACB 12
12.5 - 1/2	SG 125 EB 12	SG 125 AE 12	SG 125 ACB 12
W: 15 mm - 9/16"			
8 - 5/16	SG 80 EB 15	SG 80 AE 15	SG 80 ACB 15
10 - 3/8	SG 100 EB 15	SG 100 AE 15	SG 100 ACB 15
11 - 7/16	SG 110 EB 15	SG 110 AE 15	SG 110 ACB 15
12.5 - 1/2	SG 125 EB 15	SG 125 AE 15	SG 125 ACB 15


Schluter®-TRENDLINE Textured Color-coated Aluminum

Length = 2.5 m - 8' 2-1/2"	Textured color-coated aluminum
H = mm - in.	Item No.
W: 12.5 mm - 1/2"	
8 - 5/16	SG 80 + color* 12
10 - 3/8	SG 100 + color* 12
11 - 7/16	SG 110 + color* 12
12.5 - 1/2	SG 125 + color* 12
W: 15 mm - 9/16"	
8 - 5/16	SG 80 + color* 15
10 - 3/8	SG 100 + color* 15
11 - 7/16	SG 110 + color* 15
12.5 - 1/2	SG 125 + color* 15


*Color Codes




* To complete the item number, add the color code (e.g., SG 80 TSI 12).




Schluter®-DECO-SGC	
Length = 2.5 m - 8' 2-1/2"	Satin anodized aluminum (AE)
H = mm - in.	Item No.
W: 12.5 mm - 1/2"	
8 - 5/16	SGC 80 AE 12
10 - 3/8	SGC 100 AE 12
11 - 7/16	SGC 110 AE 12
12.5 - 1/2	SGC 125 AE 12
W: 15 mm - 9/16"	
8 - 5/16	SGC 80 AE 15
10 - 3/8	SGC 100 AE 15
11 - 7/16	SGC 110 AE 15
12.5 - 1/2	SGC 125 AE 15




Schluter®-ECK-E			
H = mm - in.	Stainless steel 304 (1.4301 = V2A) (E)	Brushed stainless steel 304 (1.4301 = V2A) (EB)	
	Item No.	Item No.	
90° Angle			
Length = 1.50 m - 4' 11"			
6 - 1/4	E37 V2A 60/150	E37 V2A EB 60/150	
8 - 5/16	E37 V2A 80/150	E37 V2A EB 80/150	
11 - 7/16	E37 V2A 110/150	E37 V2A EB 110/150	
Length = 2.00 m - 6' 7"			
6 - 1/4	E37 V2A 60/200	E37 V2A EB 60/200	
8 - 5/16	E37 V2A 80/200	E37 V2A EB 80/200	
11 - 7/16	E37 V2A 110/200	E37 V2A EB 110/200	
Length = 2.5 m - 8' 2-1/2"			
6 - 1/4	E37 V2A 60/250	E37 V2A EB 60/250	
8 - 5/16	E37 V2A 80/250	E37 V2A EB 80/250	
11 - 7/16	E37 V2A 110/250	E37 V2A EB 110/250	
Length = 3.00 m - 9' 10"			
6 - 1/4	E37 V2A 60/300	E37 V2A EB 60/300	
8 - 5/16	E37 V2A 80/300	E37 V2A EB 80/300	
11 - 7/16	E37 V2A 110/300	E37 V2A EB 110/300	
135° Angle			
Length = 2.5 m - 8' 2-1/2"			
6 - 1/4	E37 E 60S	E37 EB 60S	
8 - 5/16	E37 E 80S	E37 EB 80S	
11 - 7/16	E37 E 110S	E37 EB 110S	
Length = 3.00 m - 9' 10"			
6 - 1/4	E37 E 60S/300	E37 EB 60S/300	
8 - 5/16	E37 E 80S/300	E37 EB 80S/300	
11 - 7/16	E37 E 110S/300	E37 EB 110S/300	



Schluter®-ECK-K			
W = mm - in.	Stainless steel 304 (1.4301 = V2A) (E)	Brushed stainless steel 304 (1.4301 = V2A) (EB)	
	Item No.	Item No.	
90° Angle			
Length = 1.50 m - 4' 11"			
15 - 9/16	K15 V2A/150	K15 V2A EB/150	
32 - 1-9/32	K32 V2A/150	K32 V2A EB/150	
50 - 2	K50 V2A/150	K50 V2A EB/150	
Length = 2.00 m - 6' 7"			
32 - 1-9/32	K32 V2A/200	K32 V2A EB/200	
50 - 2	K50 V2A/200	K50 V2A EB/200	
Length = 2.5 m - 8' 2-1/2"			
15 - 9/16	K15 V2A/250	K15 V2A EB/250	
32 - 1-9/32	K32 V2A/250	K32 V2A EB/250	
50 - 2	K50 V2A/250	K50 V2A EB/250	
Length = 3.00 m - 9' 10"			
15 - 9/16	K15 V2A/300	K15 V2A EB/300	
32 - 1-9/32	K32 V2A/300	K32 V2A EB/300	
50 - 2	K50 V2A/300	K50 V2A EB/300	
135° Angle			
Length = 1.50 m - 4' 11"			
32 - 1-9/32	K32 ES/150		
Length = 2.5 m - 8' 2-1/2"			
32 - 1-9/32	K32 ES		
Length = 3.00 m - 9' 10"			
32 - 1-9/32	K32 ES/300		



Schluter®-ECK-KI		
W = mm - in.	Stainless steel 304 (1.4301 = V2A) (E)	Brushed stainless steel 304 (1.4301 = V2A) (EB)
	Item No.	Item No.
Length = 1.50 m - 4' 11"		
15 - 9/16	KI15 E/150	KI15 EB/150
Length = 2.00 m - 6' 7"		
15 - 9/16	KI15 E/200	KI15 EB/200
Length = 2.5 m - 8' 2-1/2"		
15 - 9/16	KI15 E	KI15 EB
Length = 3.00 m - 9' 10"		
15 - 9/16	KI15 E/300	KI15 EB/300



Schluter®-ECK-KHK				
Stainless steel 304 (1.4301 = V2A) (E)				
W = mm - in.	Profile	Outside corner, 90°	Inside corner, 90° (2-way)	Inside corner, 90° (3-way)
Length = 1.50 m - 4' 11"		E/KHK 15 E	1/2KHK 15 E	1/3KHK 15 E
15 - 9/16	KHK 15 E/150			
Length = 2.00 m - 6' 7"				
15 - 9/16	KHK 15 E/200			
Length = 2.5 m - 8' 2-1/2"				
15 - 9/16	KHK 15 E			
Length = 3.00 m - 9' 10"		V/KHK 15 E		
15 - 9/16	KHK 15 E/300	Connector		

Brushed stainless steel 304 (1.4301 = V2A) (EB)				
W = mm - in.	Profile	Outside corner, 90°	Inside corner, 90° (2-way)	Inside corner, 90° (3-way)
Length = 1.50 m - 4' 11"		E/KHK 15 EB	1/2KHK 15 EB	1/3KHK 15 EB
15 - 9/16	KHK 15 EB/150			
Length = 2.00 m - 6' 7"				
15 - 9/16	KHK 15 EB/200			
Length = 2.5 m - 8' 2-1/2"				
15 - 9/16	KHK 15 EB			
Length = 3.00 m - 9' 10"		V/KHK 15 EB		
15 - 9/16	KHK 15 EB/300	Connector		

