



# KERDI-DRAIN Shower Checklist

Project reference: \_\_\_\_\_

## FOOTPRINT & BASE

### Measurement of Shower

Width: \_\_\_\_\_ Length: \_\_\_\_\_ Drain placement: Center  Other

#### 1 Pre-sloped KERDI Shower Tray

**Note:** Trays can be modified by cutting or extending with dry-pack mortar.

38" x 60" (KST965/1525)	<input type="checkbox"/>	72" x 72" (KST1830)	<input type="checkbox"/>	36" x 36" (KST915BF)	<input type="checkbox"/>
48" x 60" (KST1220/1525)	<input type="checkbox"/>	38" x 60" Off-center (KST965/1525S)	<input type="checkbox"/>	38" x 38" (KST965BF)	<input type="checkbox"/>
48" x 72" (KST1220/1830)	<input type="checkbox"/>	32" x 38" (KST965/810BF)	<input type="checkbox"/>	48" x 48" (KST1220BF)	<input type="checkbox"/>
60" x 60" (KST1525)	<input type="checkbox"/>	36" x 48" (KST915/1220BF)	<input type="checkbox"/>	38" x 38" Neo angle (KST965NA/BF)	<input type="checkbox"/>

or

#### Mortar Bed

**Note:** Be sure to order enough KERDI membrane to cover the surface of the mortar bed.

#### 2 Curbs

- 38" L x 6" H x 4-1/2" W   
(KBSC 115 150 970)  
Qty: \_\_\_\_\_
- 48" L x 6" H x 4-1/2" W   
(KBSC 115 150 1220)  
Qty: \_\_\_\_\_
- 60" L x 6" H x 4-1/2" W   
(KBSC 115 150 1524)  
Qty: \_\_\_\_\_

#### and/or Ramps

- 48" L x 15-7/8" W x 1-1/2" H  
(SR 122)  
Qty: \_\_\_\_\_

## WALLS

### Measurement of Walls

Wall #1: \_\_\_\_ x \_\_\_\_ = \_\_\_\_ Wall #2: \_\_\_\_ x \_\_\_\_ = \_\_\_\_  
Wall #3: \_\_\_\_ x \_\_\_\_ = \_\_\_\_ Wall #4: \_\_\_\_ x \_\_\_\_ = \_\_\_\_  
Wall #5: \_\_\_\_ x \_\_\_\_ = \_\_\_\_ Total ft<sup>2</sup> = \_\_\_\_

#### 3 Type of Wall and Waterproofing

##### 3a. Solid backing with KERDI

- Dry wall   
Concrete board
- KERDI membrane**
- 3'-3" x 16'-5" (54 ft<sup>2</sup>)  
(KERDI200/5M)
- 3'-3" x 23' (75 ft<sup>2</sup>)  
(KERDI200/7M)
- 3'-3" x 33' (108 ft<sup>2</sup>)  
(KERDI200/10M)
- 3'-3" x 65'-7" (215 ft<sup>2</sup>)  
(KERDI200/20M)
- 3'-3" x 98'-5" (323 ft<sup>2</sup>)  
(KERDI200)
- 6'-7" x 98'-5" (646 ft<sup>2</sup>)  
(KERDI200200)

or

##### 3b. Waterproof building panel

- KERDI-BOARD**
- 32" x 48" x 1/2"   
(KB121220812)
- 64" x 48" x 1/2"   
(KB1212201625)
- 96" x 48" x 1/2"   
(KB1212202440)
- KERDI-BOARD-ZT/-ZS**
- Washers   
Screws

#### 4 KERDI-BAND

(5" wide - used to connect KERDI membrane or KERDI-BOARD with 2" overlap)

Linear feet wall seams: \_\_\_\_\_ Linear feet pan seams: \_\_\_\_\_

5" x 16'-5"  5" x 33'  5" x 98'-5"   
(KEBA100/125/5M) (KEBA100/125/10M) (KEBA100/125)

#### 5 KERDI-KERECK (waterproof corners)

**Note:** Drain Kit includes 4 inside and 2 outside corners

Inside corners: \_\_\_\_\_ Outside corners: \_\_\_\_\_  
(KERECK/FI2 - 2 pack or KERECK/FI10 - 10 pack) (KERECK/FA2 - 2 pack or KERECK/FA10 - 10 pack)


#### 6 KERDI-SEALS (waterproof seals)

**Note:** Drain Kit includes 1 pipe seal with 3/4" opening and mixing valve seal

Pipe seal: \_\_\_\_\_ Mixing valve seal: \_\_\_\_\_  
(KMS185/12 - 1/2" opening or KMS185/20 - 3/4" opening) (KMSMV235/114 - 4-1/2" opening)

#### OPTIONAL: KERDI-FIX (sealing and bonding compound)

- 290 ml 290 ml 100 ml  
KERDIFIX/BW (Bright white)  KERDIFIX/G (Grey)  KERDIFIX/100G (Grey)

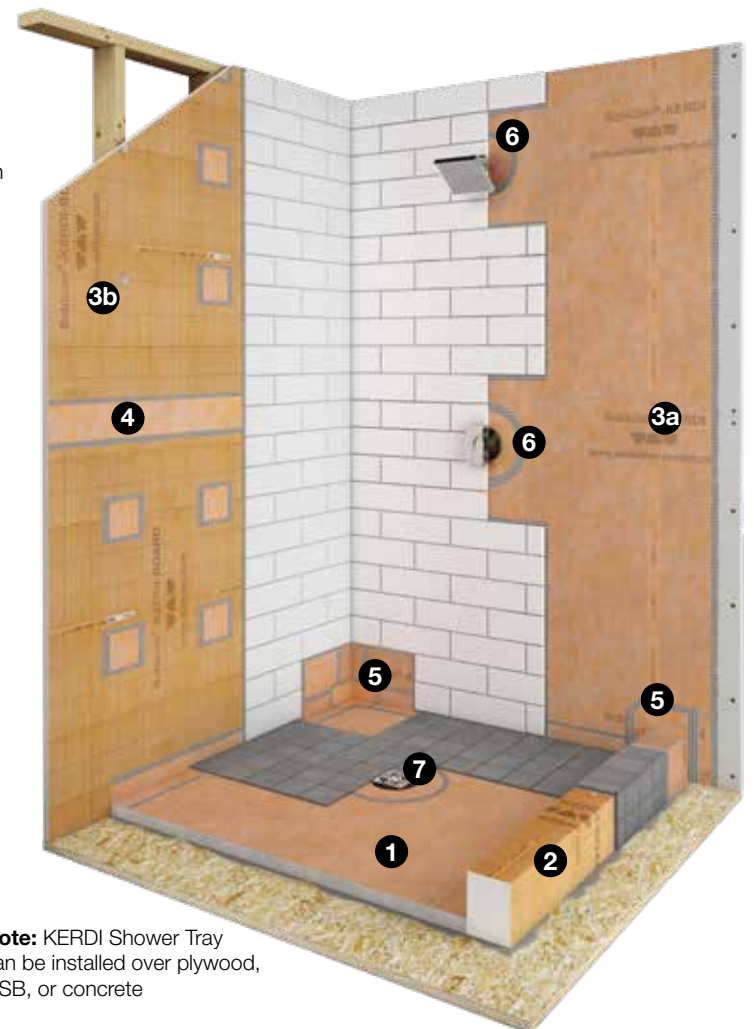

**Note:** KERDI Shower Tray can be installed over plywood, OSB, or concrete

## DRAIN

### 7 Grate Selection

#### Stainless Steel



Stainless steel (E)



Chrome (EP)



Oil rubbed bronze (EOB)



Pure



Curve



Floral

#### Anodized Aluminum



Brushed nickel (ATGB)



Brushed copper (AKGB)



Brushed brass (AMGB)



Tileable (ECS)

## ACCESSORIES

### KERDI-BOARD Benches

**Note:** Waterproofing corners are included

#### Triangle:

- 16" L x 16" W x 20" H  24" L x 24" W x 20" H   
(KBSB 410 TA) (KBSB 610 TA)

#### Rectangle:

- 38" W x 11-1/2" L x 20" H  48" W x 16" L x 20" H   
(KBSB 290 970 RA) (KBSB 410 1220 RA)

### KERDI-BOARD to Make a Custom Bench

- 96" x 24-1/2" x 2"   
(KB 50 625 2440)

### KERECK Bench/Neo-angle Corner Kit

- 1 right and 1 left bench corner, and two 135° inside corners   
(KERSB 135 K)

### KERDI-BOARD Niches

- 12" W x 6" H  12" W x 12" H   
(KB12SN305152A) (KB12SN305305A)
- 12" W x 20" H  12" W x 28" H   
(KB12SN305508A1) (KB12SN305711A1)  
- with shelf - with shelf



**NEW! Schluter® Thin-set Mortar**



\*Applicable when used as a Thin-Set System.

For full warranty details, please visit [www.schluter.com/warranty](http://www.schluter.com/warranty)



# KERDI-LINE Shower Checklist

Project reference: \_\_\_\_\_

## FOOTPRINT & BASE

### Measurement of Shower

Width: \_\_\_\_\_ Length: \_\_\_\_\_ Drain placement: Center  Other

#### 1 Pre-sloped KERDI Shower Tray

**Note:** Trays can be modified by cutting or extending with dry-pack mortar.

- |  |  |  |
|--|--|--|
| <input type="checkbox"/> 39" x 39" (KSLT1000)            | <input type="checkbox"/> 36" x 72" Perimeter (KSLT915/1830S) | <input type="checkbox"/> 55" x 55" Perimeter (KSLT1395S)     |
| <input type="checkbox"/> 55" x 55" (KSLT1395)            | <input type="checkbox"/> 76" x 38" Perimeter (KSLT1930/965S) | <input type="checkbox"/> 38" x 76" Perimeter (KSLT965/1930S) |
| <input type="checkbox"/> 48" x 48" Perimeter (KSLT1220S) | <input type="checkbox"/> 48" x 48" (KSLT1220)                |  |
| <input type="checkbox"/> 36" x 55" (KSLT915/1395S)       | <input type="checkbox"/> 39" x 39" Perimeter (KSLT1000S)     |  |

#### 2 Curbs

38" L x 6" H x 4-1/2" W   
(KBSC 115 150 970)  
Qty: \_\_\_\_\_

48" L x 6" H x 4-1/2" W   
(KBSC 115 150 1220)  
Qty: \_\_\_\_\_

60" L x 6" H x 4-1/2" W   
(KBSC 115 150 1524)  
Qty: \_\_\_\_\_

#### and/or Ramps

48" L x 15-7/8" W x 1-1/2" H   
(SR 122)  
Qty: \_\_\_\_\_

#### Mortar Bed

**Note:** Be sure to order enough KERDI membrane to cover the surface of the mortar bed.



**Note:** KERDI Shower Tray can be installed over plywood, OSB, or concrete

## WALLS

### Measurement of Walls

Wall #1: \_\_\_\_\_ x \_\_\_\_\_ = \_\_\_\_\_ Wall #2: \_\_\_\_\_ x \_\_\_\_\_ = \_\_\_\_\_

Wall #3: \_\_\_\_\_ x \_\_\_\_\_ = \_\_\_\_\_ Wall #4: \_\_\_\_\_ x \_\_\_\_\_ = \_\_\_\_\_

Wall #5: \_\_\_\_\_ x \_\_\_\_\_ = \_\_\_\_\_ Total ft<sup>2</sup> = \_\_\_\_\_

#### 3 Type of Wall and Waterproofing

##### 3a. Solid backing with KERDI

- Dry wall   
Concrete board

##### KERDI membrane

- 3'-3" x 16'-5" (54 ft<sup>2</sup>) (KERDI200/5M)  
 3'-3" x 23' (75 ft<sup>2</sup>) (KERDI200/7M)  
 3'-3" x 33' (108 ft<sup>2</sup>) (KERDI200/10M)  
 3'-3" x 65'-7" (215 ft<sup>2</sup>) (KERDI200/20M)  
 3'-3" x 98'-5" (323 ft<sup>2</sup>) (KERDI200)  
 6'-7" x 98'-5" (646 ft<sup>2</sup>) (KERDI200200)

or

##### 3b. Waterproof building panel

##### KERDI-BOARD

- 32" x 48" x 1/2" (KB121220812)  
 64" x 48" x 1/2" (KB1212201625)  
 96" x 48" x 1/2" (KB1212202440)

##### KERDI-BOARD-ZT/-ZS

- Washers   
Screws

#### 4 KERDI-BAND

(5" wide - used to connect KERDI membrane or KERDI-BOARD with 2" overlap)

Linear feet wall seams: \_\_\_\_\_ Linear feet pan seams: \_\_\_\_\_

- 5" x 16'-5" (KEBA100/125/5M)  5" x 33' (KEBA100/125/10M)  5" x 98'-5" (KEBA100/125)

#### 5 KERDI-KERECK (waterproof corners)

**Note:** Drain Kit includes 4 inside and 2 outside corners

Inside corners: \_\_\_\_\_  
(KERECK/FI2 - 2 pack or KERECK/FI10 - 10 pack)

Outside corners: \_\_\_\_\_  
(KERECK/FA2 - 2 pack or KERECK/FA10 - 10 pack)

#### 6 KERDI-SEALS (waterproof seals)

**Note:** Drain Kit includes 1 pipe seal with 3/4" opening and mixing valve seal

Pipe seal: \_\_\_\_\_  
(KMS185/12 - 1/2" opening or KMS185/20 - 3/4" opening)

Mixing valve seal: \_\_\_\_\_  
(KMSMV235/114 - 4-1/2" opening)

#### OPTIONAL: KERDI-FIX (sealing and bonding compound)

- 290 ml** KERDIFIX/BW (Bright white)  **290 ml** KERDIFIX/G (Grey)  **100 ml** KERDIFIX/100G (Grey)

View installation videos at: [www.schluter.com](http://www.schluter.com)

## DRAIN

#### 7 Grate Selection

Center outlet  Off-set outlet

Length: \_\_\_\_\_

**Note:** The stated length of the KERDI-LINE is the size of the grate, the actual opening must be larger to accommodate the flange.

Type of grate:

##### STYLE



Floral



Curve



Pure

##### Closed



Stainless steel (EB)




Chrome (EP)

##### Perforated



Stainless steel (EB)



Chrome (EP)

##### Tileable



Tileable

If you have selected a STYLE, Closed or Perforated grate you must choose your frame height:



3/4" - 19 mm frame height   
for tile thicknesses of 1/8" - 9/16"



1-1/8" - 30 mm frame height   
for tile thicknesses of 1/2" - 1"

#### ACCESSORIES

All accessories such as benches and niches can be selected on the other side of this page.

**IMPORTANT:** Please read the Schluter®-Shower System Installation Handbook and Schluter®-Shower System Technical Data Sheet to ensure the materials you have selected are appropriate for your application.